

HOW TO ORDER

Filter – F08-F38

Particulate Filter Numbering System

F 1 8 – 0 3 – S L 0 0

F Unit Function

F = Filter

1 Family

- 8** 08 = Miniature
 18 = Compact
 28 = Standard
 38 = Jumbo (Some bowl configurations are not available for the F38 Series Filter. Refer to Price List)

0 Thread Type

- 0 = NPT
 C = BSPP (ISO, R228 [G Series])

3 Pipe Size

- | | |
|---------|---------|
| 1 = 1/8 | 4 = 1/2 |
| 2 = 1/4 | 6 = 3/4 |
| 3 = 3/8 | 8 = 1 |

S Filter Element


- 0 = No element
 S = 5 Micron

L Bowls/Drains

Drains	Plastic w/guard Nitrile Standard	Metal w/sight glass ¹ Fluorocarbon Standard
None	C	D
1/8 NPT Female ²	E	F
Std Auto Drain ²	G	H
Manual Drain	K	L
Low Flow Auto Drain ²	N	P
Piston Drain (B08 only)	R	S

¹F08 Filter has an all metal bowl (no sight gauge)

²Except 08 Series

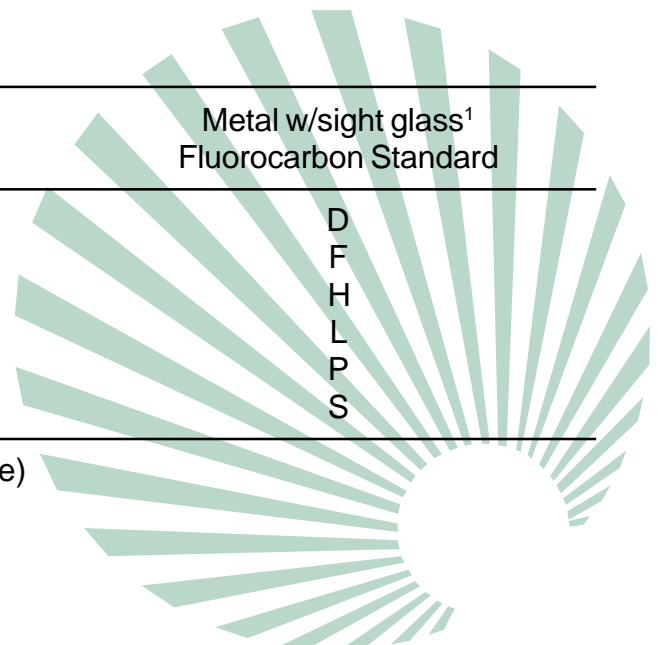

0 Options

- 0 = None
- L = Differential pressure indicator
(Not available on F08 and F38 Series Filter)
- V = Fluorocarbon Seals

0 Options

- 0 = None
- L = Differential pressure indicator
(Not available on F08 and F38 Series Filter)
- V = Fluorocarbon Seals

Note: When selecting from the options columns, please enter letters in alphabetical order, for example:

F18 – 03 – S L 0 0

"F" Series Filters, Type "A" 5 micron elements

All Wilkerson Type "A" 5 micron elements meet or exceed ISO Class 3 for maximum particle size and concentration of solid contaminants.

Note: All classes above refer to International Standards Organisation (ISO) standard 8573-1:1991 (E), pertaining to maximum particle size and concentration of solid contaminants, and maximum oil content.

