

TECHNICAL SPECIFICATION

Lockout Valve – V08



Product Description



Performance



Construction



How to Order



Dimensional Details



PRODUCT DESCRIPTION

The V08 safety lockout valve is a manually operated, slide-type, 2 position, 3 way valve. In the closed position, downstream air is exhausted to atmosphere. The valve slide can be locked in the closed position with a customer supplied padlock. The V08 safety lockout valves conform to OSHA#29 CFR part 1910-control of hazardous energy source (lockout/tagout).



PERFORMANCE

Port Size	BSPP-G (ISO228)	1/8, 1/4
Flow Capacity*	1/8 1/4	55 scfm (26 dm ³ /s) 100 scfm (47,2 dm ³ /s)
Exhaust Flow	V08, 1/8 V08, 1/4	Cv = 0.241 Cv = 0.253
Maximum Operating Temperature	150°F (65,5°C)	
Maximum Supply Pressure	150 psig (10,3 bar)	
Weight	lb (kg)	0.66 (0,3)

* Inlet pressure 150 psig (10,3 bar). Pressure drop 5 psid (0,3 bar).



CONSTRUCTION

Body

Zinc

Blade

Acetal

Seals

Nitrile




HOW TO ORDER

Model Type	Port Size	Safety Lockout Valve
V08	1/8	V08-C1-0000
	1/4	V08-C2-0000



DIMENSIONAL DETAILS

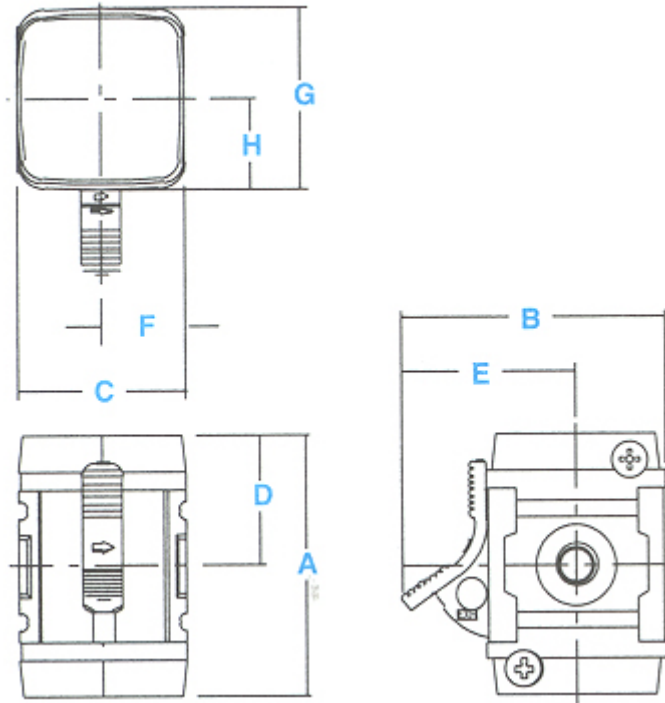

Models	A mm (inches)	B mm (inches)	C mm (inches)	D mm (inches)	E mm (inches)	F mm (inches)	G mm (inches)	H mm (inches)
Standard Unit V08-XX-0000	61.2 (2.41)	62.5 (2.46)	40.0 (1.58)	30.7 (1.21)	41.4 (1.63)	20.0 (0.79)	42.7 (1.68)	21.3 (0.84)

